

## *Man way:*


**Chief Agri/Industrial can provide various types of man ways for access from roof.**

**Roof:** Vented Man way 20" X 26" including inspection port 16" x 5" and filter media. Man way filter is constructed of High Loft, Multi-Ply, Non-woven Polyester, UL listed Class II. Allows air to travel through the filter, while restricting dust particles, and escape through the openings while keeping out contaminants and foreign objects. Filter may be removed, cleaned, and reused. The manway allows for fast and convenient bin inspection. Standard Man Ways are painted with a High Quality Enamel.



*Standard Man way*

- Options:**
- Epoxy Coated
  - Hot Dip Galvanize
  - Stainless Steel
  - Adaptable for use with Steel or Concrete roof designs

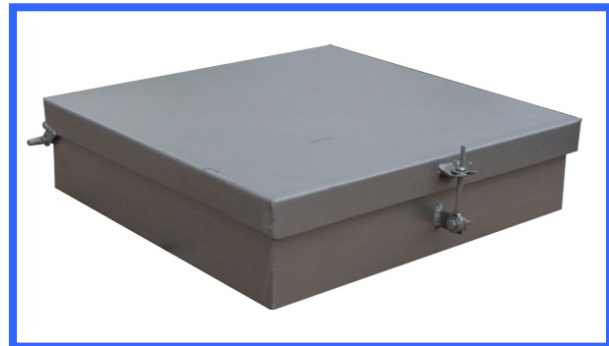

*Sealed Man way*

**Options:**

<u>Size</u>	<u>Description</u>	<u>Approx Weight</u>
• 20" Diameter PVR Manway		60 lbs.
• 18" X 18" Vented Manway		50 lbs.
• 18" X 18" Sealed Manway		40 lbs.
• 24" X 24" Vented Manway		65 lbs.
• 24" X 24" Sealed Manway		55 lbs.

**PVR Man way**

